

The Geotech Redi-Flo2® (formerly Grundfos) electrical submersible pump provides smooth, uninterrupted water flow during ground water sampling to depths down to 280 feet (85m). Both high flow rates needed for purging and low flows recommended for sampling are achieved with the same pump.

FEATURES


- **Chemically inert materials**
Maximum sample integrity and easy decontamination
- **1.8 inch (4.6cm) diameter**
Easy access into 2" (5cm) or larger wells
- **Flow rates range from 8 GPM (30 LPM) to as little as 100ml/min**
Controlled with the simple push of a button
- **Low velocities and agitation**
Ideal for sampling and purging
- **Portable solid state converter**
Eliminates the need for control valves
- **Continuous flow**
Ensures a cleaner, simpler sample catch
- **Dedicated or Portable configurations available**

OPERATION


Designed for long-term reliability in dedicated monitoring wells, the Redi-Flo2® provides optimal sample quality. Whether doing traditional purging prior to sampling or low draw-down passive sampling when operated with the Geotech VFD (Variable Frequency Drive) flow control is easy!

Purging and sampling with the same pump is extremely efficient. The unique design and superior materials allow for easy operation, decontamination and maintenance as well as disassembly and reassembly.

PERFORMANCE

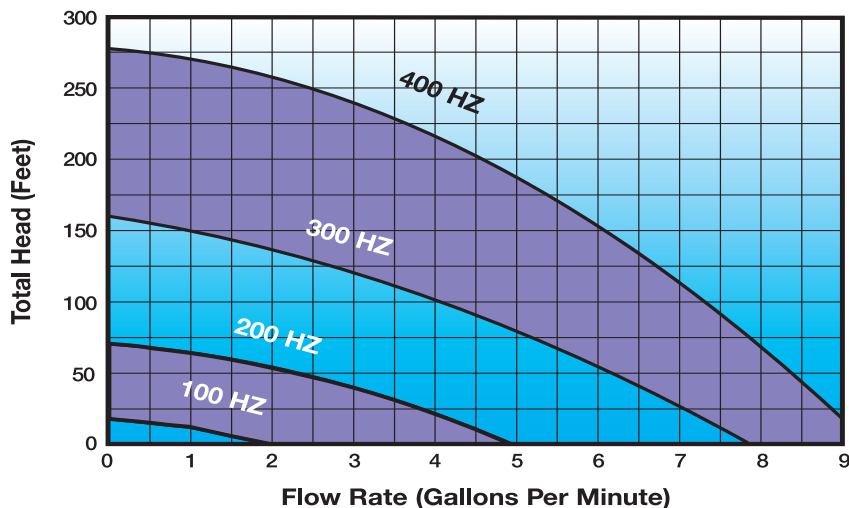

Redi-Flo2® pump as a portable system mounted on Geo Reel



Dedicated Redi-Flo2® pump setup with tubing, All-In-One motor lead and integrated safety cable, and well cap

Add confidence using the Geotech all-in-one motor lead with integrated safety cable



CALL GEOTECH TODAY

(800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue Denver, Colorado 80205

(303) 320-4764 FAX (303) 322 7242

email: sales@geotechenv.com website: www.geotechenv.com

Request
Information


CUSTOM ACCESSORIES

Professional accessories make your job easier, your equipment last longer, and protect your investment!

Geotech has a shroud specifically designed for use with the Geotech Redi-Flo2® in wells 4" (10cm) in diameter or larger. The Redi-Flo2® electrical submersible pump was designed to stay cool by the action of the water passing rapidly over the body of the stainless steel and PTFE pump. In 2" (5cm) diameter wells this is achieved automatically. In larger diameter wells the pump may overheat, causing permanent damage to the inner workings. The Geotech pump shroud can help you avoid damage to your Redi-Flo2® pump, and help you to protect your investment, project after project.

If your site plan requires all the water passing through your pump be disposed of and not allowed to return to the well, ask your sales representative about our custom stainless steel check valve.

DIMENSIONS

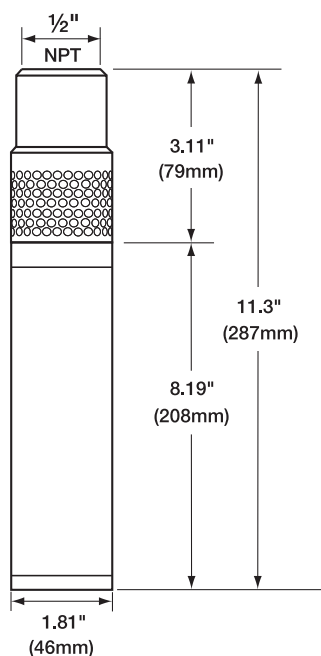

TECHNICAL SPECIFICATIONS		
Electric	Full Load Rating	5 HP/220V/3 PH/400 Hz/5.5A
	Maximum Current (FSA)	5.5 amps
	Motor Protection	Thermal overload- Thermik Geratebau, Series SY6 (176°F/80°C)
	Current Overload	Incorporated into Geotech VFD (9.0A for 10 seconds)
Piping Connection		
	Discharge Port	1/2" Female NPT
Operating Conditions		
	Minimum Ambient Fluid Temp.	34°F (1°C)
	Maximum Ambient Fluid Temp.	80°F (28°C)
Motor Fluid		
	Motor Lubricating Fluid	Deionized (DI) Water
Dimensions & Weight (Pump and Motor)		
	Dimensions	11.3" L x 1.81" D (28.7cm L x 4.6cm D)
	Net Weight	5.5 lbs. (2.5 kg), excluding motor lead
Load Lengths		
	Standard Lengths in Feet	30, 50, 75, 100, 125, 150, 175, 200, 250, 300 (9, 15, 23, 30, 38, 46, 53, 61, 76, 91 meters)
	Custom Lengths	Available in 1 ft. (0.3m) increments from 30 to 300 ft. (9-91m).



**Redi-Flo2®
Cooling Shroud**



Redi-Flo2® Stainless Steel Check Valve

CALL GEOTECH TODAY

(800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue Denver, Colorado 80205


(303) 320-4764 FAX (303) 322 7242

email: sales@geotechenv.com website: www.geotechenv.com

PUMP COMPONENTS			
#	Part Description	No. Used Per Pump	Part Number
1	Inlet Screen	1	1A0004
2	Pump Housing 1/2" NPT	1	1A0044
3	Guide Vane	2	See Service Kits
4	Wear Ring	2	See Service Kits
5	Impeller	2	See Service Kits
6	Spacer Ring	2	See Service Kits
7	Wear Plate	2	See Service Kits
8	Motor Lead Assembly	4	See Pos. 13-18
9	Shaft, Rotor	1	Not Available*
10	Suction Interconnector	1	1A5004
11	Stator Housing	1	Not Available*
12	Set Screw	1	See Service Kits
13	Ground Motor Screw	1	See Service Kits
14	Motor Lead Screw	1	See Service Kits
15	PTFE Washer	4	
16	Brass Washer	2	
17	Grommet	3	
18	Crimped Pin	3	
19	Motor Screw (long)	2	
20	Motor Screw (short)	6	
21	Filling Screw w/O-Ring	1	
22	Motor Thrust Washers	2	
23	Lip Seal	1	ID5566
24	Bearing Housing O-Ring	2	

*Not economical to replace, must purchase complete pump/motor.

PARTS DESCRIPTION

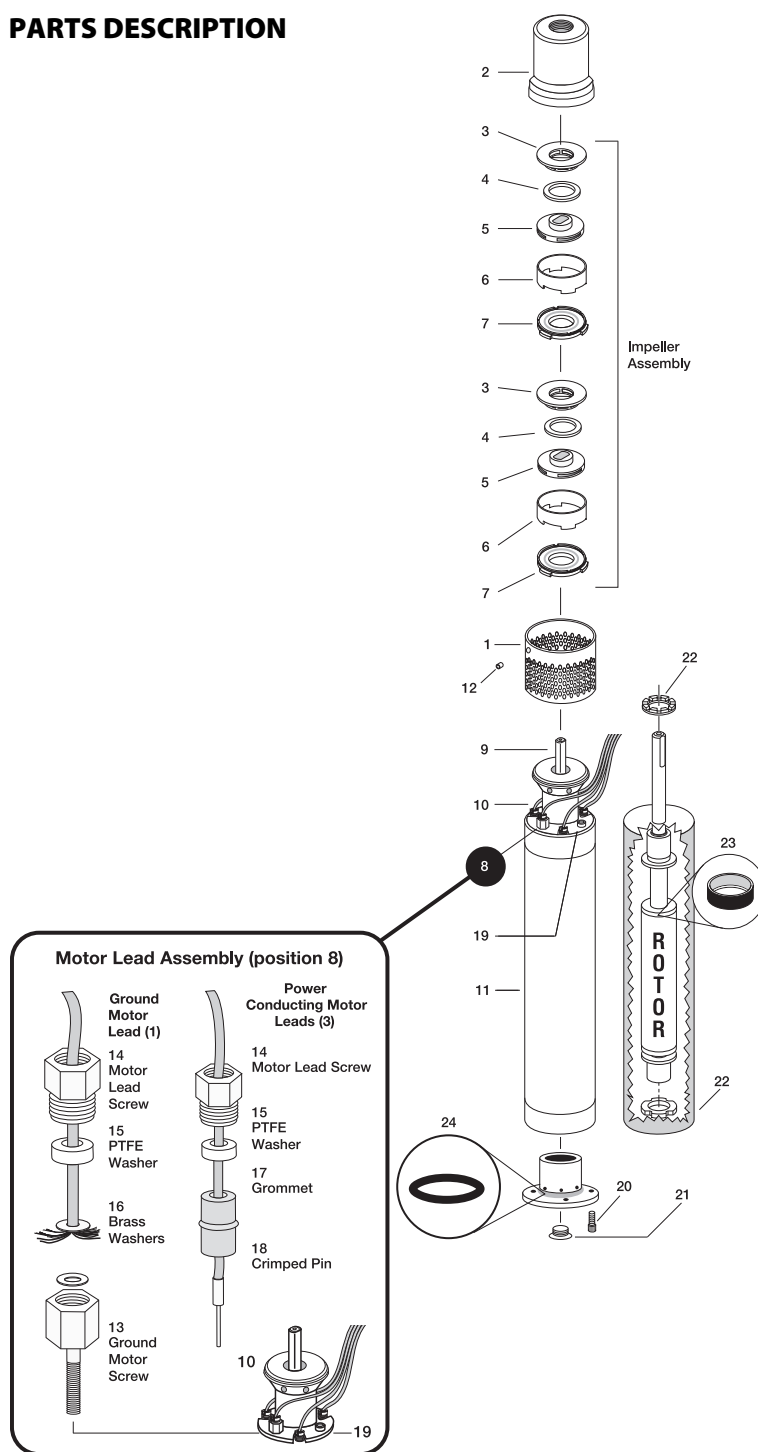

CALL GEOTECH TODAY

(800) 833-7958

Geotech Environmental Equipment, Inc.

2650 East 40th Avenue Denver, Colorado 80205

(303) 320-4764 FAX (303) 322 7242

email: sales@geotechenv.com website: www.geotechenv.com