Lufft UMB Sensor Overview

	Wind	Temperature Rel. humidity Air pressure	Temperature Rel. humidity Air pressure Precipitation	Temperature Rel. humidity Air pressure Radiance (solar radiation)
Titan				
	Ventus			WS310
Platinum				
				WS301/303
Gold				
	V200A	WS300	WS400	WS304
Professional				
	WS200		WS401	WS302

Temperature Rel. humidity Air pressure Wind speed Wind direction	Temperature Rel. humidity Air pressure Wind speed Wind direction Radiance (solar radiation)	Temperature Rel. humidity Air pressure Wind speed Wind direction Precipitation	Temperature Rel. humidity Air pressure Wind speed Wind direction Precipitation Radiation	2 Channel EXPANDER	Protocols
				ANACON	UMB MODBUS ASCII SDI12
	WS510				
				ANACON	UMB MODBUS ASCII SDI12
	WS501/503				
				ANACON	UMB MODBUS ASCII SDI12
WS500	WS504	WS600	WS700		
				ANACON	UMB MODBUS ASCII SDI12
	WS502	WS601			

Lufft WS300-UMB – Temperature, Air Pressure, Relative Humidity

From the WS product family of professional intelligent measurement transducers with digital interface for environmental applications.

Integrated design with ventilated radiation protection for measuring:

- Air temperature
- Relative humidity
- Air pressure

Relative humidity is measured by means of a capacitive sensor element;
a precision NTC measuring element is used to measure air temperature.

Measurement output can be accessed by the following protocolls:
UMB-Binary, UMB-ASCII, SDI-12, MODBUS

One external temperature or rain sensor is connectable.

Lufft WS300-UMB Smart Weather Sensor			Order No.
WS300-UMB			**8372.U01**
Technical Data	Dimensions	Ø approx. 150 mm, height approx. 223 mm	
	Weight	Approx. 1kg	
Temperature	Principle	NTC	
	Measuring range	–50…60 °C	
	Accuracy	±0.2 °C (–20 °C … +50 °C), otherwise ±0.5 °C (>–30 °C)	
Relative humidity	Principle	Capacitive	
	Measuring range	0…100% RH	
	Accuracy	±2% RH	
Air pressure	Principle	MEMS Capacitive	
	Measuring range	300…1200hPa	
	Accuracy	±0.5hPa (0…+40 °C)	
General Information	Interface	RS485, 2-wire, half-duplex	
	Protection type housing	IP66	
	Op. power consumption	4...32VDC	
	Operating humidity range	0…100%	
	Op. temperature range	–50…60 °C	
Accessories	Surge protection		**8379.USP**
	Power supply 24V/4A		**8366.USV1**
	UMB Interface converter ISOCON-UMB		**8160.UISO**
	Digital-analog-converter DACON8-UMB		**8160.UDAC**
	Temperature Sensor WT1		**8160.WT1**
	Road Surface Temperature Sensor WST1		**8160.WST1**
	Rain Sensor WTB100		**8353.10**
	Connection cable, 20m		**8370.UKAB20**

Aspirated temperature/humidity measurement

Open communication protocol:
- UMB-ASCII
- UMB-Binary
- SDI-12
- MODBUS
- Analoge outputs in combination with 8160.UDAC

Third-Party-Rain gauge sensors are compatible: 0.1mm, 0.2mm, 0.5mm, 1mm heated and un-heated.

Standard Certificate for all UMB-Sensors

LUFFT Mess- und Regeltechnik GmbH

Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2
Manufacturer test certificate M according to DIN 55350-18-4.2.2

Gegenstand *Object*	**IRS31-UMB**		
Sensornummer *Sensor number*		Seriennummer *Serial number*	
Hersteller *Manufacturer*	**G. Lufft Mess- und Regeltechnik GmbH** **Gutenbergstraße 20** **70736 Fellbach, Germany**		

Temperaturmessung / ***Temperature measurement***

Prüfpunkt ***Test point***	**Prüfbedingung** ***Test conditions***	**Bestanden** ***Passed***	
		Ja *Yes*	Nein *No*
Fahrbahnoberflächentemperatur *Road surface temperature*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*	X	
Tiefentemperatur 1 *Temperature under ground 1*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*	X	
Tiefentemperatur 2 *Temperature under ground 2*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*	X	

Temperatursensor / ***Temperature sensor***

Prüfpunkt ***Test point***	**Prüfbedingung** ***Test conditions***	**Bestanden** ***Passed***	
		Ja *Yes*	Nein *No*
Fahrbahnoberflächensensor *Road surface sensor*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*		
Tiefentemperatursensor 1 *Temperature sensor under ground 1*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*		
Tiefentemperatursensor 2 *Temperature sensor under ground 2*	Temperatur = 0,0 °C ±0,1 °C *Temperature = 0,0 °C ±0,1 °C*		

Dieses Prüfzertifikat darf nur vollständig und unverändert weiterverbreitet werden. Auszüge oder Ä
bedürfen der Genehmigung des Ausstellers. Prüfzertifikate ohne Unterschrift und Stempel haben keine
This test certificate may not be reproduced other than in full except with the permission of the exhibitin
Test certificates without signature and seal are not valid.

Stempel *Seal*	Datum *Date*	Qualitätssicherung *Quality control*	Bearbeiter *Person in charge*
		i. V. Rolf Großmann	

LUFFT Mess- und Regeltechnik GmbH

Herstellerprüfzertifikat M nach DIN 55350-18-4.2.2
Manufacturer test certificate M according to DIN 55350-18-4.2.2
Seriennummer / ***Serial number*:**

Kalibrierung Gefriertemperatur / ***Calibration freezing point***

Wasserfilmhöhe ***water film height***	**Gefriertemperatur** ***freezing point***	**Sollwert** **reference value**	**Messwert** **reading**
H_2O + NaCl 11,8 %, 1000 µm	-8,9 °C ± 1 °C	11,8 % ± 1,0 %	%
H_2O + NaCl 2,0 %, 500 µm	-1,0 °C ± 1 °C	2,0 % ± 1,0 %	%
H_2O + NaCl 1,1 %, 250 µm	-0,6 °C ± 1 °C	1,1 % ± 1,0 %	%

Kalibrierung Wasserfilmhöhe / ***Calibration water film height***

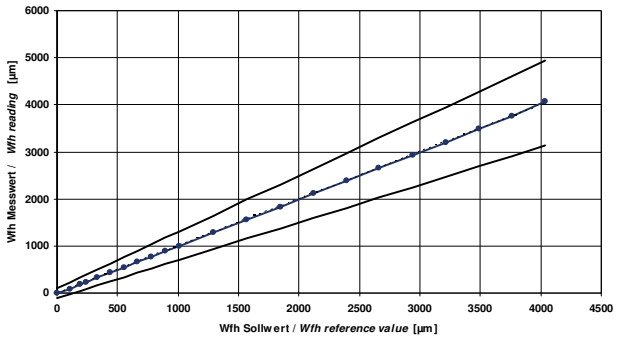

Funktionstest / ***Function test***

Prüfpunkt ***Test point***	**Prüfbedingung** ***Test conditions***	**Bestanden** ***Passed***	
		Ja *Yes*	Nein *No*
Temperaturzyklus von –30 °C…+70 °C *Temperaturecycle from –30 °C...+70 °C*	Alle Messwerte korrekt *All measured values correctly*	X	