



a xylem brand

YSI 6820 and 6920 V2 Sondes

With 1 or 2 Optical Sensor Ports and Wide Range of Sensor Options

Measure a wide variety of parameters for long-term monitoring, profiling or sampling in fresh, sea or polluted water.

Two versions available for each sonde:

- The 6820/6920 V2-1 has one optical port, conductivity/temperature port, Rapid Pulse™ DO port, pH/ORP port, and three ISE ports
- The 6820/6920 V2-2 has two optical ports, conductivity/temperature port, pH/ORP port, and one ISE port
- Self-cleaning optical sensors with improved wiping
- Field-replaceable sensors
- 6920 V2 has a built-in battery compartment for long-term *in situ* monitoring




Parameters:

Measure multiple parameters simultaneously:

- Ammonium, Chloride, or Nitrate (ISEs)
- Conductivity
- Depth/Level
- Rapid Pulse™ Dissolved Oxygen (V2-1 only)
- ORP
- pH
- Resistivity
- Salinity
- Specific Conductance
- TDS
- Temperature

Plus one or two of these optical sensors:

- Blue-green Algae PC or PE
- Chlorophyll
- ROX™ Dissolved Oxygen
- Rhodamine
- Turbidity

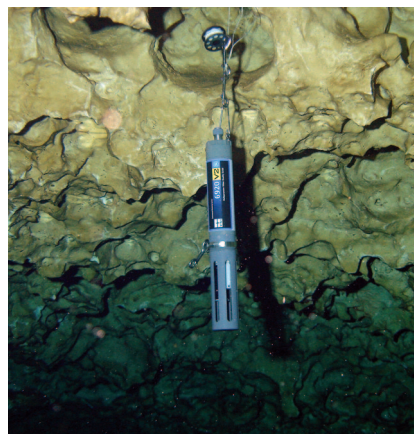

YSI 6820 V2 & 6920 V2 Sensor Specifications

	Range	Resolution	Accuracy
ROX™ Optical Dissolved Oxygen* % Saturation 6150 Sensor	0 to 500%	0.1%	0 to 200%: ±1% of reading or 1% air saturation, whichever is greater; 200 to 500%: ±15% of reading, relative to calibration gases
ROX™ Optical Dissolved Oxygen* mg/L 6150 Sensor	0 to 50 mg/L	0.01 mg/L	0 to 20 mg/L: ±0.1 mg/L or 1% of reading, whichever is greater; 20 to 50 mg/L: ±15% of reading, relative to calibration gases
Dissolved Oxygen** % Saturation 6562 Rapid Pulse™ Sensor	0 to 500%	0.1%	0 to 200%: ±2% of reading or 2% air saturation, whichever is greater; 200 to 500%: ±6% of reading
Dissolved Oxygen** mg/L 6562 Rapid Pulse™ Sensor	0 to 50 mg/L	0.01 mg/L	0 to 20 mg/L: ±0.2 mg/L or 2% of reading, whichever is greater; 20 to 50 mg/L: ±6% of reading
Conductivity*** 6560 Sensor	0 to 100 mS/cm	0.001 to 0.1 mS/cm (range dependent)	±0.5% of reading + 0.001 mS/cm
Salinity	0 to 70 ppt	0.01 ppt	±1% of reading or 0.1 ppt, whichever is greater
Temperature 6560 Sensor	-5 to +50°C	0.01°C	±0.15°C
pH 6561 Sensor	0 to 14 units	0.01 unit	±0.2 unit
ORP	-999 to +999 mV	0.1 mV	±20 mV
Depth	Medium Shallow Vented Level	0 to 200 ft, 61 m 0 to 30 ft, 9.1 m 0 to 30 ft, 9.1 m	0.001 ft, 0.001 m 0.001 ft, 0.001 m 0.001 ft, 0.001 m
Turbidity* 6136 Sensor	0 to 1,000 NTU	0.1 NTU	±2% of reading or 0.3 NTU, whichever is greater*
Ammonium/ammonia/ Nitrate/nitrogen****	0 to 200 mg/L-N	0.001 to 1 mg/L-N (range dependent)	±10% of reading or 2 mg/L, whichever is greater
Chloride****	0 to 1000 mg/L	0.001 to 1 mg/L (range dependent)	±15% of reading or 5 mg/L, whichever is greater
Rhodamine* 6130 Sensor	0-200 µg/L	0.1 µg/L	±5% reading or 1 µg/L, whichever is greater

* Max. depth rating for optical probes is 200 ft, 61 m; depth rating for anti-fouling optical probes is 656 ft, 200 m.
 ** Rapid Pulse is only available on the 6820/6920 V2-1 (one optical port version)
 *** Report outputs of specific conductance (conductivity corrected to 25°C), resistivity, and total dissolved solids are also provided. These values are automatically calculated from conductivity according to algorithms found in *Standard Methods for the Examination of Water and Wastewater* (ed 1989).
 **** Freshwater only, Maximum depth rating of 50 ft, 15.2 m. 6820/6920 V2-1 have 3 ISE ports; 6820/6920 V2-2 have 1 ISE port.
 *In YSI AMCO-AEPA Polymer Standards.

	Range	Detection Limit	Resolution	Linearity
BGA - Phycocyanin* 6131 Sensor	~0 to 280,000 cells/mL† 0 to 100 RFU	~220 cells/mL‡	1 cell/mL 0.1 RFU	R² > 0.9999**
BGA - Phycoerythrin* 6132 Sensor	~0 to 200,000 cells/mL† 0 to 100 RFU	~450 cells/mL‡§	1 cell/mL 0.1 RFU	R² > 0.9999***
Chlorophyll* 6025 Sensor	~0 to 400 µg/L 0 to 100 RFU	~0.1 µg/L Chl a‡§§	0.1 µg/L Chl 0.1% RFU	R² > 0.9999****

† Explanation of Ranges can be found in the 'Principles of Operation' section of the 6-Series Manual.
 ‡ Estimated from cultures of *Microcystis aeruginosa*.
 § Estimated from cultures *Synechococcus sp.*
 §§ Determined from cultures of *Isochrysis sp.* and chlorophyll a concentration determined via extractions.
 **Relative to serial dilution of Rhodamine WT (0-400 µg/L).
 ***Relative to serial dilution of Rhodamine WT (0-8 µg/L).
 ****Relative to serial dilution of Rhodamine WT (0-500 µg/L).

YSI 6820 V2 & 6920 V2 Sonde Specifications

Medium	Fresh, sea or polluted water	Software	EcoWatch®
Temperature	Operating Storage	6820 V2 6920 V2	Diameter Length Weight
Communications	RS-232, SDI-12	Power	External Internal

Temperature: -5 to +50°C
 Operating Storage: -10 to +60°C
 Diameter: 2.86 in, 7.3 cm | 2.85 in, 7.24 cm
 Length: 13.5 in, 34.3 cm | 18 in, 45.7 cm
 Weight: 3.4 lbs, 1.5 kg | 4 lbs, 1.8 kg
 Power: 12 V DC
 External Internal: 8 AA-size alkaline batteries

YSI

1725 Brannum Lane, Yellow Springs, OH 45387
 Tel +1 937.767.7241 800.897.4151 (US)
 environmental@ysi.com
 YSI.com

ISO 9001

ISO 14001

Yellow Springs, Ohio Facility



a xylem brand

YSI is a registered trademark of Xylem Inc.
 Specifications are subject to change. Please visit YSI.com to verify all specs.
 ©2012 Xylem Inc.
 Printed in the USA. E36-05 June 2012